

*Knowledge Resource & Relay Centre (KRRC)*

AIKTC/KRRC/SoET/ACKN/QUES/2021-22/

Date: 02/08/2022School: SoET-REV. C-SCHEME Branch: EXTC SEM: VI

To,  
 Exam Controller,  
 AIKTC, New Panvel.

Dear Sir/Madam,

Received with thanks the following Semester/Unit Test-I/Unit Test-II (Reg./ATKT) question papers from your exam cell:

Sr. No.	Subject Name	Subject Code	Format		No. of Copies
			SC	HC	
1	Electromagnetics and Antenna	ECC601		✓	
2	Computer Communication Networks	ECC602		✓	
3	Image Processing and Machine Vision	ECC603		✓	
4	Artificial Neural Network and Fuzzy Logic	ECC604		✓	
5	Department Level Optional Course II <i>24-Digital Forensics</i>	ECC605		✓	

Note: SC – Softcopy, HC - Hardcopy

(Shaheen Ansari)  
 Librarian, AIKTC

Sub: E&amp;A, R-19

18/05/2022

Sem: VI

Q1) Choose the correct option from the following questions. Each question carries equal marks.

(20 marks)

1) The ratio of maximum power density in the desired direction to the average power radiated from the antenna is called as \_\_\_\_\_

- A Directivity
- B Directive gain
- C Power gain
- D Partial directivity

2) If the length of the dipole decreases then the radiation resistance will \_\_\_\_\_

- A Increase
- B Decrease
- C Depends on current distribution
- D Not change

3) If charges  $+Q$  and  $-Q$  are existing in some medium then the electric field intensity will terminate at \_\_\_\_\_

- A At origin
- B At  $+Q$
- C At  $-Q$
- D At infinity

4) Using Stoke's theorem we convert \_\_\_\_\_ integration into \_\_\_\_\_ integration

- A Line, surface
- B Line, volume
- C Single, triple
- D Volume, line

5)  $\nabla^2 V = \text{_____}$  is the Laplace's equation

- A 0
- B  $\infty$
- C  $\frac{-\rho}{\epsilon}$
- D  $\frac{\rho}{\epsilon}$

6) Using boundary conditions, one can calculate \_\_\_\_\_ component.

- A Tangential and normal
- B Only tangential
- C Only normal
- D Sequential and Tangential

7) If the distance between the transmitting and receiving antenna is decreased by factor 2 while factors remain same, then the new power received by the antenna \_\_\_\_\_

- A Increases by factor 2

B Decreases by factor 2

C Increases by factor 4

D Decreases by factor 4

8) Which of the following is true for circular polarization?

- A  $E_x = E_y$  and  $\varphi = \frac{\pi}{2}$
- B  $E_x = E_y$  and  $\varphi = \frac{\pi}{4}$
- C  $E_x \neq E_y$  and  $\varphi = \frac{\pi}{2}$
- D  $E_x \neq E_y$  and  $\varphi = \frac{\pi}{4}$

9) Gauss's law for the electric field is given by \_\_\_\_\_

- A  $\nabla \cdot D = 0$
- B  $\nabla \times D = \rho_v$
- C  $\nabla \times D = 0$
- D  $\nabla \cdot D = \rho_v$

10) In yagi Uda, the length of the director compared to the driven element is \_\_\_\_\_

- A Greater
- B Smaller
- C Independent to each other
- D Depends on the type driven element

Q2) Solve any two.

(20)

2a) Define maximum usable frequency and skip distance. Derive maximum usable frequency in terms of skip distance and virtual height.

2b) Write short note on parabolic reflector antenna. Describe feeding techniques of parabolic reflector array.

2c) State and explain Coulomb's law in electrostatics. A point charge  $Q_1 = 2\text{mC}$  is located in free space at  $P_1(-3, 7, -4)$  while  $Q_2 = 5\text{nC}$  is at  $P_2(2, 4, -1)$ . Find force on  $Q_2$  by  $Q_1$  and vice versa.

Q3) Solve any two.

(20)

3a) Derive array factor of N-element linear array, where all elements are equally fed and spaced. Also find the expression for the position of principle maxima, nulls and secondary maxima.

3b) Discuss electric field and magnetic field boundary conditions at the interface of two mediums with relevant mathematical equations.

3c) Describe the space wave propagation and derive relation for maximum distance between transmitting and receiving antenna. Earth is assumed to be flat.

Q4) Solve any two.

(20 marks)

- 4a) Derive Maxwell's equation in point form and integral form.
- 4b) Design a rectangular microstrip patch antenna with dimensions W and L over a single substrate whose center frequency is 2.4 GHz. The dielectric constant of the substrate is 4.4 and the height of the substrate is 1.6 mm. Determine the physical dimensions W and L (in cm) of the patch, taking into account fringing field.
- 4c) Describe what is fading. What are the different types of fading. Explain each of them in details.



21/5/2022

**University of Mumbai****Examinations Summer 2022****Program: Electronics & Telecommunication****Curriculum Scheme: Rev 2019\_C Scheme****Examination: TE Semester VI****Course Name: Computer Communication Network (CCN)****Max. Marks: 80****Course Code: ECC 602****Time: 2 hour 30 minutes**

<b>Q1.</b>	<b>Choose the correct option for following questions. All the Questions are compulsory and carry equal marks</b>
1.	Which of this is not a guided media?
Option A:	Fiber optical cable
Option B:	Coaxial cable
Option C:	Copper wire
Option D:	Wireless LAN
2.	Errol control and flow control are the functions of the following layer of OSI model.
Option A:	Application
Option B:	Session
Option C:	Data link layer
Option D:	Presentation
3.	work at the network layer of the OSI model.
Option A:	Bridges
Option B:	Hubs
Option C:	Routers
Option D:	Gateways
4.	Which of following protocols is used by IP for generating error reports
Option A:	ICMP
Option B:	IGMP
Option C:	IGRP
Option D:	ARP
5.	device is used to regenerate the signals at physical layer.
Option A:	Repeater
Option B:	Switch
Option C:	Bridge
Option D:	Router
6.	Which of the following is not an application layer protocol
Option A:	IP
Option B:	SMTP
Option C:	HTTP
Option D:	DNS
7.	Find the class of address 14.23.120.8.

Option A:	Class A
Option B:	Class C
Option C:	Class B
Option D:	Class D
8.	Telnet is used for
Option A:	Assigning IP address to a host
Option B:	Remote Login
Option C:	Assigning name to an IP address
Option D:	Video Compression
9.	Which of the following layers support process to process communication?
Option A:	Network layer
Option B:	Data link layer
Option C:	Session layer
Option D:	Transport layer
10.	Which of the following protocols provides email service?
Option A:	HTTP
Option B:	SMTP
Option C:	FTP
Option D:	TFTP

Q2	(20Marks Each)	
A	Solve any Two	5marks each
i.	Explain in detail Digital Subscriber Line (DSL).	
ii.	Compare logical address and physical address.	
iii.	Explain the OSI reference model and functions of each layer.	
B	Solve any One	10 marks each
i.	Explain the different error reporting messages in ICMP with message format.	
ii.	Compare IPv4 and IPv6	

Q3	(20 Marks Each)	
	Solve any Two	5 marks each
	The following is the dump of TCP header in hexadecimal format:05320017 00000061 00000000 300207FF 00000000	
	1) What is the source port number? 2) What is the destination port number? 3) What is the sequence number? 4) What is the acknowledgement number? 5) What is the length of the header?	
ii.	Differentiate between Bus Topology and Ring Topology.	
iii.	Explain Three-Way Handshaking for connection establishment in TCP	
B.	Solve any One	10 marks each
	Explain HDLC frame format and the control frames with neat diagrams. Explain bit stuffing in HDLC.	
ii.	Classify transmission media. List the applications of each. Compare Twisted pair	

cable, Coaxial cable and Fiber optical cable.
---

<b>Q4</b>	<b>(20 Marks Each)</b>	
A	Solve any Two	<b>5 marks each</b>
i.	Explain Selective Repeat ARQ.	
ii.	Explain the transition states of DHCP with a neat diagram.	
iii.	Compare RIP and OSPF unicast routing protocols.	
B	Solve any One	<b>10 marks each</b>
i.	An ISP is granted a block of addresses starting with 160.100.0.0/16. The ISP needs to distribute this address to three groups of customers as follows: Group I: The first group has 64 customers and each needs 256 addresses. Group II: The second group has 128 customers and each needs 128 addresses. Design the subblocks and find out how many addresses are still available after these allocations. Group III: 128 customers each need 64 addresses Design subblocks and give slash notation for each sub block. Find how many addresses are still available after this allocation.	
ii.	What are the Hardware network devices? Explain any four in details.	

**University of Mumbai****Examinations Summer FH2022****Program: Electronics and Telecommunication Engineering**

Curriculum Scheme: Rev2019

Examination: TE Semester VI

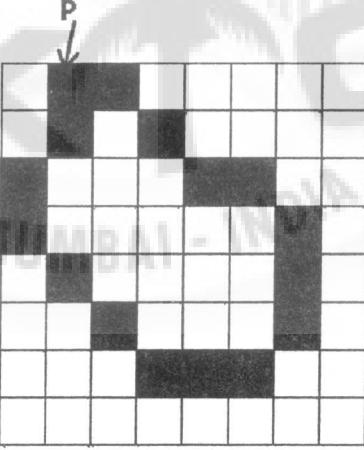
Course Code: ECC603 and Course Name: Image Processing Machine Vision

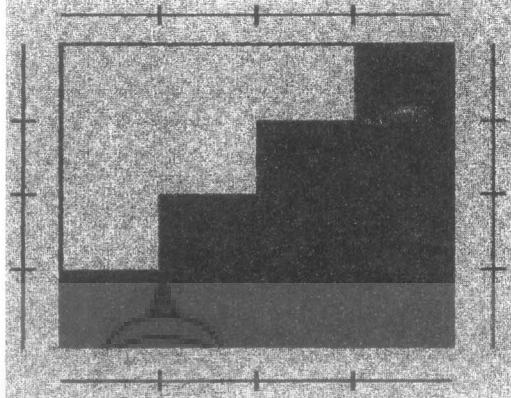
Time: 2 hours 30 minutes

**Max. Marks: 80**

<b>Q1.</b>	<b>Choose the correct option for following questions. All the Questions are compulsory and carry equal marks. State the option clearly in your answer-book.</b>
1.	Equalized histogram of digital image is always:
Option A:	Almost uniformly distributed over $[0, L-1]$
Option B:	Exactly uniformly distributed over $[0, L-1]$
Option C:	Concentrated in lower side of $[0, L-1]$
Option D:	Concentrated in higher side of $[0, L-1]$
2.	Spatial domain techniques used for a. Using complete dynamic range b. Binarizing a digital image, respectively, are
Option A:	a) Log transformation b) contrast stretching
Option B:	a) Contrast stretching b) thresholding function
Option C:	a) Image negative function b) Log transformation
Option D:	a) Thresholding function b) contrast stretching
3.	If the standard deviation of pixels is positive, then the sub image is labelled as
Option A:	Red
Option B:	White
Option C:	Green
Option D:	Black
4.	Increasing radius of the white circle in the Low Pass filter employed in frequency domain enhancement of digital images, results in
Option A:	More blurred image
Option B:	More sharpened image
Option C:	Clearer image with more details
Option D:	Darker image with thin details
5.	A Support Vector Machine can be best described as
Option A:	A machine learning algorithm used in pattern recognition
Option B:	A pattern recognition algorithm used in object recognition
Option C:	A neural network algorithm used for supervised learning
Option D:	A machine learning algorithm used for classification/regression
6.	The major difference between Image Enhancement and Image Restoration is that
Option A:	Enhancement is an objective process and Restoration is a subjective process
Option B:	Enhancement uses filtering techniques while Restoration uses morphological techniques.
Option C:	Restoration is an objective process and Enhancement is a subjective process
Option D:	Restoration uses filtering techniques while Enhancement uses morphological techniques.

7.	Segmentation is usually not perfect due to number of factors such as
Option A:	Noise and bad illumination
Option B:	object contains several regions
Option C:	boundary-filling
Option D:	closed contour
8.	The method used for point detection is
Option A:	Second derivative
Option B:	First Derivative
Option C:	Third Derivative
Option D:	Fourth Derivative
9.	Which of the following is process of partition the digital image into multiple regions
Option A:	Merging
Option B:	Filling
Option C:	Transform
Option D:	Splitting
10.	Signature of a circle as a shape is
Option A:	a triangular waveform
Option B:	a 45-degree line
Option C:	a square waveform
Option D:	a horizontal line

Q2.	
A	Solve any Two <span style="float: right;">5 marks each</span>
i.	Explain Unsharp Masking and High-boost Filtering.
ii.	 <p>For the image shown above, find 8-directional chain code and shape number. Consider P as starting point and clockwise direction for the path.</p>

	<p>iii. Show the segmentation of the following image using split-and-merge technique.</p> 																		
B	<p><b>Solve any One</b> <span style="float: right;">10 marks each</span></p>																		
i.	<p>Explain the principle of spatial domain filtering. Perform averaging operation using 3 by 3 mask on the image given below. Use zero padded image for performing averaging operation.</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>4</td><td>1</td><td>7</td></tr> <tr> <td>3</td><td>4</td><td>1</td></tr> <tr> <td>2</td><td>3</td><td>5</td></tr> </table>	4	1	7	3	4	1	2	3	5									
4	1	7																	
3	4	1																	
2	3	5																	
ii.	<p>Obtain equalized histogram for the following distribution.</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Intensity</th><th>0</th><th>1</th><th>2</th><th>3</th><th>4</th><th>5</th><th>6</th><th>7</th></tr> </thead> <tbody> <tr> <td>Number of pixels</td><td>70</td><td>40</td><td>100</td><td>40</td><td>10</td><td>70</td><td>10</td><td>60</td></tr> </tbody> </table>	Intensity	0	1	2	3	4	5	6	7	Number of pixels	70	40	100	40	10	70	10	60
Intensity	0	1	2	3	4	5	6	7											
Number of pixels	70	40	100	40	10	70	10	60											
Q3.																			
A	<p><b>Solve any Two</b> <span style="float: right;">5 marks each</span></p>																		
i.	<p>Justify/contradict: Shape numbers are rotation invariant representations of shape contours.</p>																		
ii.	<p>Compare Ideal, Butterworth and Gaussian filtering.</p>																		
iii.	<p>Obtain 2-D DFT of the following digital image.</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>3</td><td>1</td><td>2</td><td>2</td></tr> <tr> <td>1</td><td>3</td><td>2</td><td>2</td></tr> <tr> <td>2</td><td>1</td><td>4</td><td>3</td></tr> <tr> <td>1</td><td>2</td><td>3</td><td>4</td></tr> </table>	3	1	2	2	1	3	2	2	2	1	4	3	1	2	3	4		
3	1	2	2																
1	3	2	2																
2	1	4	3																
1	2	3	4																
	<p><b>PTO</b></p>																		

		<p><b>B</b></p> <p><b>Solve any One</b></p> <p style="text-align: right;"><b>10 marks each</b></p>
i.		<p>Perform opening of the following image with the given structuring element and closing of the compliment of the same image with the same structuring element.</p> <p>SE:</p> $\begin{bmatrix} 0 & 1 & 0 \\ 1 & 1 & 1 \\ 0 & 1 & 0 \end{bmatrix}$
		<p>Image:</p> $f(x,y) = \begin{bmatrix} 1 & 1 & 0 & 0 & 1 & 1 \\ 1 & 1 & 1 & 1 & 1 & 1 \\ 0 & 1 & 0 & 0 & 1 & 1 \\ 0 & 0 & 0 & 1 & 1 & 1 \\ 0 & 0 & 0 & 1 & 1 & 0 \end{bmatrix}$
ii.		<p>Illustrate K-means algorithm with a suitable example.</p>
<b>Q4.</b>		
A	<b>Solve any Two</b>	<b>5 marks each</b>
i.	Justify/contradict: A deviation in the position of support vectors does not affect the classification hyperplane.	
ii.	Derive Haar transform for N=4.	
iii.	State principles of Object Recognition and explain techniques used at each step of object recognition.	
B	<b>Solve any One</b>	<b>10 marks each</b>
i.	Draw and explain model of image degradation.	
ii.	Explain Canny edge detection algorithm in detail with proper schematics.	

**END OF QUESTION PAPER**

Program: BE Electronics and Telecommunication Engineering

Curriculum Scheme: Revised 2019

Examination: Third Year VI Semester

Course Code: ECC604 and Course Name: Artificial Neural Networks and Fuzzy Logic

Time: 2 Hour and 30 Min

Max. Marks: 80

Note to the students: - All the Questions are compulsory and carry equal marks.

Q1.	XOR problem is exceptionally interesting to neural network researchers because
Option A:	It can be expressed in a way that allows you to use a neural network
Option B:	It is complex binary operation that cannot be solved using neural networks
Option C:	It can be solved by a single layer perceptron
Option D:	It is the simplest linearly inseparable problem that exists.
Q2.	The network that involves backward links from output to the input and hidden layers is called as
Option A:	Self-organizing maps
Option B:	Perceptron
Option C:	Recurrent neural network
Option D:	Multi layered perceptron
Q3.	Automated vehicle is an example of
Option A:	Supervised Learning
Option B:	Unsupervised Learning
Option C:	Kohonen Learning
Option D:	Reinforcement Learning
Q4.	In an Unsupervised learning
Option A:	Specific output values are given
Option B:	Specific output values are not given
Option C:	No specific Inputs are given
Option D:	Both inputs and outputs are given
Q5.	_____ computes the output volume by computing dot product between all filters and image patch.
Option A:	Input Layer
Option B:	Convolution Layer
Option C:	Activation Function Layer
Option D:	Pool Layer
Q6.	If an input image is a matrix of size 28 X 28 and a kernel/filter of size 7 X 7 with a stride of 1. What will be the size of the convoluted matrix?
Option A:	20 x 20
Option B:	26 x 26
Option C:	24 x 24
Option D:	22 x 22

Q7.	In a simple Multi-layer Perceptron neural network model with 10 neurons in the input layer, 4 neurons in the hidden layer and 1 neuron in the output layer. What is the size of the weight matrices between hidden output layer and input hidden layer?
Option A:	[1 X 4] , [4 X 10]
Option B:	[4 X 1] , [10 X 4]
Option C:	[10 X 4] , [4 X 1]
Option D:	[10 X 4] , [1 X 4]
Q8.	In a fuzzy set, the membership function generally ranges
Option A:	10-100
Option B:	100-1000
Option C:	1-10
Option D:	0 – 1
Q9.	Three main basic features involved in characterizing membership function are
Option A:	Intuition, Inference and Rank ordering
Option B:	Weighted Average, Mean of maximum, Centroid
Option C:	Fuzzification, Defuzzification, Knowledge base
Option D:	Core, Support and Boundary
Q10.	In SVM, if the number of input features is 2, then the hyper plane is a
Option A:	Line
Option B:	Plane
Option C:	Circle
Option D:	Square

Q2	Solve any Four out of Six	(5 marks each)
A	Compare Artificial Neurons with Biological Neurons. Draw the structure of Biological Neuron.	
B	What are Support Vectors in Support Vector Machines (SVM)? How SVM differs from conventional classifiers?	
C	Draw two input AND gate using MP neuron	
D	What do you mean by K-Means algorithm? Where is it used?	
E	What are the different types of Neural Network architectures?	
F	Prove DeMorgan's Theorem for the given two fuzzy sets Fuzzy set $A = \left\{ \frac{0.4}{10} + \frac{0.9}{20} + \frac{0.1}{30} \right\}$ and Fuzzy set $B = \left\{ \frac{0.2}{10} + \frac{0.7}{20} + \frac{0.6}{30} \right\}$	

Q3	Solve any Two out of Three	(10 marks Each)
A	What is Mamdani Fuzzy Inference System (FIS)? What is the use of knowledge base and rule base in FIS? Draw the block diagram of FIS.	
B	Organize the given samples (1 1 0 0), (0 0 0 1), (1 0 0 0) into two clusters using Kohonen self-organizing map. Assume the learning rate as 0.1. The weight matrix is given by	

	$W_{ij} = \begin{pmatrix} 0.1 & 0.6 \\ 0.2 & 0.8 \\ 0.8 & 0.2 \\ 0.1 & 0.5 \end{pmatrix}$
C	With neat flow chart, describe the training algorithm for Perceptron network.

Q4	Solve any Two out of Three (10 marks each)
A	Design a fuzzy controller to determine the wash time of a fuzzy washing machine. Assume the two fuzzy inputs are dirtiness of cloth and washing load. Consider 3 descriptors for both inputs and output. Show that wash time is high if clothes are soiled to higher degree.
B	Draw Hopfield network with four output nodes. List the steps involved in its testing algorithm. For an input vector (1 1 0 1), calculate the weight matrix.
C	Draw the architecture of simple Convolution Neural Network. Define the following terms with respect to CNN. i. Convolution ii. Max Pooling iii. ReLU Activation iv. Flattening

**University of Mumbai****Examination Summer 2022**

Q Pode: 94144

Program: Electronics and Telecommunication Engineering

Curriculum Scheme: Rev2019

31/05/2022

Examination: TE Semester: VI

Course Code: ECCDLO6013 and Course Name: Digital Forensic (DF)

Time: 2 hour 30 minutes

Max. Marks: 80

<b>Q1.</b>	<b>Choose the correct option for the following questions. All the questions are compulsory and carry equal marks</b>
1.	Someone who exploits a security vulnerability in order to spread public awareness that the vulnerability exists, is called?  Option A: White Hat Hacker Option B: Black Hat Hackers. Option C: Gray Hat Hackers. Option D: Red Hat Hackers.
2.	CSIRT stands for  Option A: Computer Safety Incident Response Team Option B: Computer Security Incident Response Team Option C: Computer Security Incident Responsible Team Option D: Computer Security Information Response Team
3.	In which phase of Incident Response Methodology, Data Collection and Data Analysis happens  Option A: Detection of Incident Option B: Formulate response strategy Option C: Investigate the Incident Option D: Reporting
4.	Which statement is not true regarding Evidence Admissibility  Option A: Evidence should not be competent. Option B: Evidence should be relevant. Option C: Evidence should be material. Option D: Evidence should be obtained legally.
5.	Which of the following is the disk-search utility which is used to perform a search from a physical level?  Option A: PsLogList Option B: Dumpel.exe Option C: dtSearch Option D: hosts
6.	Which statute protects the privacy of individuals' healthcare data?  Option A: Privacy Act Option B: HIPAA Option C: Computer Fraud and Abuse Act Option D: DMCA
7.	A computer program that attaches itself to legitimate code and runs with the

	program.
Option A:	Virus
Option B:	Worm
Option C:	Trojan Horse
Option D:	Trapdoor
8.	What will be the response strategy for the DOS attack incidents?
Option A:	Investigate website
Option B:	Reconfigure router to minimize flooding
Option C:	Law enforcement contacted
Option D:	Monitor attackers' activities
9.	System processes and device driver activities are recorded in _____ log
Option A:	System log
Option B:	Application log
Option C:	Security log
Option D:	sysctl
10.	Which tool is used for acquiring and analyzing forensic images?
Option A:	FTK Imager
Option B:	Scalpel
Option C:	Foremost
Option D:	Volatility

<b>Q2(20 Marks)</b>	<b>Solve any Four out of Six (5 marks each)</b>
A	Differentiate passive and active attacks.
B	Differentiate attacks and vulnerabilities.
C	What are the different challenges of evidence handling?
D	Explain the steps of volatile data collection for the Unix system.
E	Differentiate between Virus, Worm, Trojan horse, and trap door.
F	What is packet sniffing? How is it done? What are the threats due to packet sniffing?

<b>Q3 (20 Marks)</b>	<b>Solve any Two Questions out of Three 10 marks each</b>
A	Define cybercrime. Discuss various cybercrime categories in detail.
B	Discuss how network based evidence is collected and analyzed?
C	Write a short note on the Acquisition, Duplication, Analysis, and Recovery of digital evidence

<b>Q4 (20 Marks)</b>	
A	<b>Solve any Two ( 5 marks each)</b>
i.	Which are possible investigation phases carried out in data collection and analysis?
ii.	Explain Incident Response Methodology (IRM) with a neat diagram.
iii.	Explain various types of law and different levels of law in detail?
B	<b>Solve any One (10 marks each)</b>
i.	What is Intrusion Detection System (IDS)? Discuss different types of IDS and types of intrusion detection systems methods.
ii.	Discuss the necessity of forensic duplication