


- N.B** (1) Question No.1 is compulsory  
 (2) Solve any three questions of the remaining questions .  
 (3) Assume suitable data if required.  
 (4) Draw neat figures.

- Q 1) Answer any Four out of the following. 20
- Derive Darcy's Weisbach equation for calculating loss of head due to friction in pipe.
  - Write a note on water hammer and control measures.
  - Define mach number and state its significance in compressible fluid flow.
  - Explain kinetic energy correction factor and momentum correction factor.
  - Differentiate between viscous and turbulent flow.
- Q 2) a) A pipe 100 mm in diameter and 40 m long conveys water at a velocity of 2.50 m /s. If the central 20 m length is replaced by a 200 mm diameter pipe, find the savings in head loss. Assume that the change in section are sudden. Take co-efficient of friction as 0.01 and co-efficient of contraction  $C_c=0.62$  10
- b) Derive an expression for equivalent size of pipe to replace the pipe in series. A piping system consist of three pipes arranged in series . The lengths of the pipes are 1000 m, 800 m and 300 m and the diameters are 500 mm, 400 mm and 300 mm respectively when they are connected in series. These pipes are to be replaced by a single pipe of length 2100 m. Find the diameter of single pipe. 10
- Q 3) a) A horizontal pipe 4000 m long supplies water to a hydraulic machine through a 200 mm diameter pipe. Find the maximum power transmitted if the pressure at inlet to the pipe is 8000 kPa. Take  $f=0.007$  08
- b) Two reservoirs, having a difference in elevation of 15 m, are connected by a 200 mm diameter syphon. The length of the syphon is 400 m and the summit is 3 m above the water level in the upper reservoir. The length of the pipe from upper reservoir to summit is 120 m. If the co-efficient of friction is 0.005, determine discharge through syphon and pressure at the summit. Neglect minor losses. 10
- c) Crude oil of kinematic viscosity 2.25 stoke flows through a 20 cm diameter pipe ,the rate of flow being 15 lit/sec. Find the type of flow. 02

[TURN OVER

- Q 4) a) Calculate the discharge distribution in the network shown below. The head loss  $h_f$  in a pipe is given by  $h_f = rQ^{1.85}$ . The values of  $r$  for various pipes and also the inflows or outflows are given in table . 10

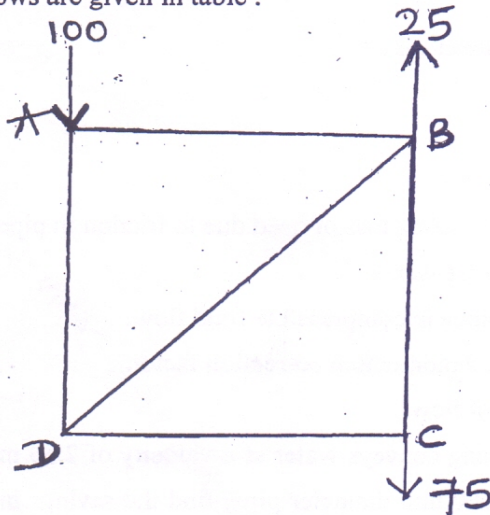

| Pipe    | AB | BC | CD | DA | BD |
|---------|----|----|----|----|----|
| r value | 1  | 2  | 1  | 2  | 2  |

- b) A supersonic plane flies at 2000 km/hr at an altitude of 9 km above sea level in standard atmosphere. If the pressure and density of air at this altitude are stated to be 30 kN/m<sup>2</sup> absolute and 0.45 kg/m<sup>3</sup>, make calculations for the pressure, temperature and density at stagnation point on the nose of the plane. Take  $R = 287$  J/kg.K &  $\gamma = 1.4$ . 10
- Q 5) a) Derive an expression for mean velocity for laminar flow between fixed parallel plates. 08
- b) Oil of specific gravity 0.82 is pumped through a horizontal pipeline 150 mm in diameter and 3 km long at the rate of 0.015 m<sup>3</sup>/s. The pump has an efficiency of 68 % and requires 7.5 kW to pump the oil. (i) What is the dynamic viscosity of oil. 12  
(ii) Is the flow Laminar?
- Q 6) a) Derive Universal Velocity distribution equation for turbulent flow . 10
- b) In a pipe of diameter 300 mm the centre-line velocity and the velocity at a point 100 mm from center, as measured by pitot tube , are 2.4 m/s and 2.0 m/s respectively. Assuming the flow in the pipe to be turbulent, find : (i) Discharge through the pipe, (ii) Co-efficient of friction and (iii) Height of roughness projections 10

End of paper