

21

SE-SEM-IV - CBGS - EATC
CS

22/12/15


QP Code : 5535

(3 Hours)


[Total Marks :80

- N.B. :**
- (1) Question No.1 is compulsory
 - (2) Attempt any **three** questions out of the remaining questions.
 - (3) Assume **data** whenever **necessary**.
 - (4) **Figures** to the **right** indicate **full marks**.


- 1. (a) Define rise time. 5
- (b) Define gain margin and phase margin. 5
- (c) What are the difficulties encountered in applying Routh stability criterion? 5
- (d) Find out response of give system for a unit step I/P 5

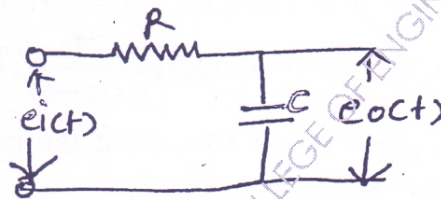

- 2. (a) Obtain the transfer function of the mechanical systems shown in Fig. 11a (i). 10

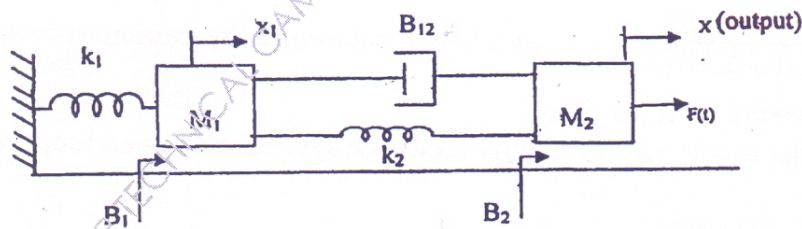

- (b) Draw a signal flow graph for the system shown in fig 11a (ii) and hence obtain the transfer function using Mason's gain formula. 10

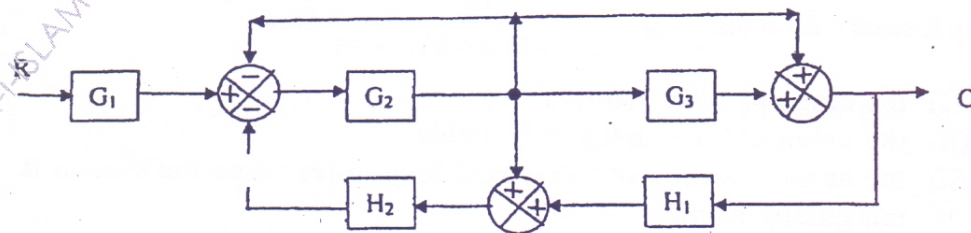

[TURN OVER

3. (a) Derive the expression for step response of second-order under damped system. 10
 (b) Find the impulse response of the second order system whose transfer function 10

$$G(s) = \frac{9}{(s^2 + 4s + 9)}$$

4. (a) A unity feedback system is characterized by an open loop transfer function 10
 $G(s) = \frac{K}{s(s+10)}$ Determine the gain K so that the system will have a damping ratio of 0.5. For this value of K determine settling time peak over shoot and time to peak over shoot for a unit step input.

- (b) An unity feedback system is given as $G(s) = \frac{1}{s(s+1)}$ The input to the system is described by $r(t) = 4 + 6t + 2t^2$. Find the generalized error coefficients and the steady state error. 10

5. (a) Sketch the Bode plot showing the magnitude in dB and phase angle in degrees as a function of log frequency for the transfer function given by 10
 $G(s) = \frac{10}{s(1+0.5s)(1+0.1s)}$ and hence determine the gain margin and the phase margin of the system.

- (b) Sketch the root locus for a unity feedback system with open loop transfer function 10
 $G(s) = \frac{K}{s(s^2 + 8s + 32)}$

6. (a) Using Routh-Hurwitz criterion for the unity feedback system with open loop transfer function $G(s) = \frac{K}{s(s+1)(s+2)(s+5)}$ find 10

- (i) the range of k for stability
 (ii) the value of k for marginally stable
 (iii) the actual location of the closed loop poles when the system is marginally stable.

- (b) Explain controllability and observability. 10