

2013-14
(ATKT)

(3 Hours)

[Total Marks : 80


- N.B.: (1) Question No.1 is compulsory. Answer any three from the remaining five questions.
(2) All questions carry equal marks.
(3) Assume suitable data wherever necessary.
(4) Use of non-programmable calculator is permitted.
(5) Figures to right indicate full marks.

1. Attempt any four :—

20


- What is sagging and hogging in bending moments give its sign conventions.
- Draw stress strain curve for ductile material and explain salient points on it.
- What are the assumptions made in simple bending, derive flexural formula.
- Calculate the strain energy stored in a bar 2m long, 50mm wide and 40mm thick when it is subjected to a tensile load of 60 kN. Take, $E = 200$ GPa.
- What are the assumptions made in the analysis of struts and column by Euler's buckling theory? What are its limitations?
- A steel spherical shell of radius 600 mm has a wall thickness of 6mm. Determine maximum stress caused due to internal pressure of a 0.8 N/mm². Take, $E = 210$ GPa and Poisson's Ratio = 0.3

2. (a) A beam of 10m length is acted upon by forces and couple as shown in fig. Draw SFD and BMD. 14

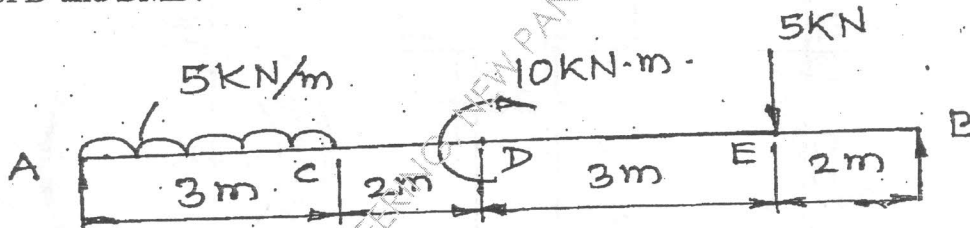

(b) Derive the relation between Elastic constants i.e. E, K and G. 6

3. (a) Find deflection of point B for the beam as shown in figure. 10

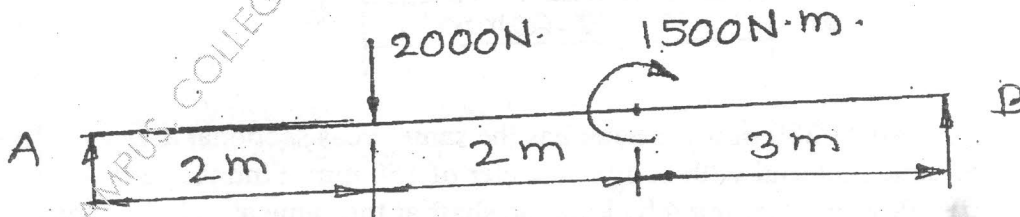


Con. 11998-14.




[TURN OVER

- (b) A rectangular block is loaded as shown in figure. Find the change in dimensions and also change in volume. Take, Poisson's Ratio as 0.3 and $E = 210 \text{ GPa}$ $AB = 500 \text{ mm}$, $BC = 200 \text{ mm}$ and $AE = 400 \text{ mm}$.

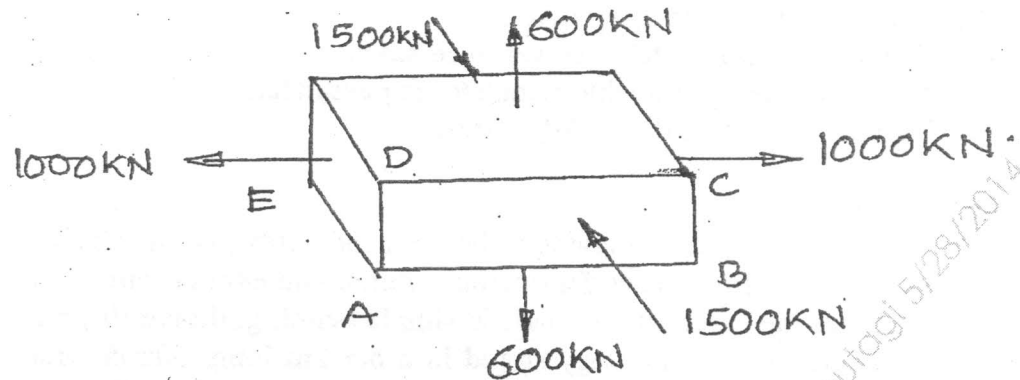

4. (a) The tension flange of cost iron I-section beam is 240 mm wide and 50 mm deep. The compression flange is 100 mm wide and 20 mm deep where as the web is 300 mm \times 30 mm. Find the load per meter run which can be carried over a 4 m span by a simply supported beam if the maximum permissible stresses are 90 MPa in compression and 24 MPa in tension.

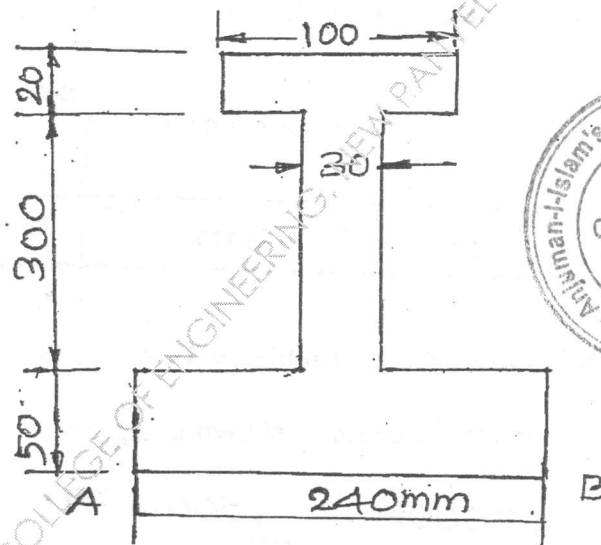

- (b) A solid shaft of 200 mm diameter has the same cross sectional area as hollow shaft of the same material with inside diameter of 150 mm. Find the ratio of –
- Power transmitted by both the shaft at the same angular velocity
 - Angle of twist in equal length of these shaft when stressed to same intensities.

QP Code : NP-18708

(3 Hours)

[Total Marks : 80

- N. B. :** (1) Question No. 1 is **compulsory**.
 (2) Attempt any **three** questions out of remaining questions.
 (3) Illustrate your answers with neat sketches.

1. (a) Explain the various casting defects with their causes and remedies. 10
 (b) Explain press forging? Discuss its advantages over hammer forging. 5
 (c) Differentiate soldering and brazing. 5
2. (a) A cylindrical riser is to be designed for a sand casting mould. The size of steel casting, is $7.5 \text{ cm} \times 12.5 \text{ cm} \times 2 \text{ cm}$. The previous operation have indicated that the total solidification time for casting is 96 second. The cylindrical riser have $(d/n) = 1$. Find the size of riser so that the total solidification time is 120 seconds. 10
 (b) Discuss resistance welding process with its applications. 5
 (c) Differentiate open the forging and closed die forging. 5
3. (a) Discuss the various defects in rolled parts. 10
 (b) Discuss riveted joints state their advantages over other joints. 5
 (c) Explain submerged arc welding with its applications. 5
4. (a) Explain the stepwise procedure of powder metallurgy in detail. 10
 (b) Explain the Rotational moulding with its advantages and applications. 5
 (c) Explain die penetrant testing method of NDT. 5
5. (a) Explain the screw type injection moulding with neat sketch. Discuss its advantages, limitations and applications. 10
 (b) What is powder metallurgy? Discuss its advantages, applications and limitations. 5
 (c) Explain with neat sketches different types of flames generated in gas welding? 5
6. Write Short note on (any four) :- 20
 - (i) Pattern materials
 - (ii) Welding defects
 - (iii) Ultrasonic testing
 - (iv) CO_2 welding
 - (v) Thread Rolling.



[SE - Civil &
SE - Mechanical]

Sem III - (CBSGS)

A.M. - III

31/5/14

QP Code : NP-18610

(3 Hours)

[Total Marks : 80

- N.B. (1) Question no. 1 is compulsory.
(2) Solve any three questions out of the remaining Q.no. 2 to Q. no. 6.

1. (a) Find the inverse Laplace transform of

$$\frac{S^2 + 5}{(S^2 + 4S + 13)^2}$$

20

(b) If $V = 3x^2y + 6xy - y^3$, show that the function V is harmonic, find the corresponding analytic function.

(c) Evaluate $\int_C \bar{z} dz$ where C is the upper half of the circle $r = 1$.

(d) Prove that $f_1(x) = 1$, $f_2(x) = x$, $f_3(x) = \frac{3x^2 - 1}{2}$ are orthogonal over $(-1, 1)$.

2. (a) Evaluate $\int_0^{\infty} \frac{\cos at - \cos bt}{t} dt$

6

(b) Obtain complex form of fourier series $f(x) = e^{-ax}$ for in $(-\pi, \pi)$

6

(c) Using Crank-Nicholson simplified formula solve, $\frac{\partial^2 u}{\partial x^2} - \frac{\partial u}{\partial t} = 0$

8

$$u(0, t) = 0, u(4, t) = 0, u(x, 0) = \frac{x}{3} (16 - x^2)$$

Find u_{ij} for $i = 0, 1, 2, 3, 4$, and $j = 0, 1, 2$.

3. (a) Evaluate $\int_C \frac{\sin^6 z}{(z - \pi/6)^3} dz$ where C is $|z| = 1$

6

(b) Find the fourier expansion for $f(x) = x - x^2 - 1 < x < 1$

6

(c) Determine the solution of one dimensional heat equation, $\frac{\partial u}{\partial t} = C^2 \frac{\partial^2 u}{\partial x^2}$ under the boundary conditions $u(0, t) = 0$, $u(\ell, t) = 0$ and $u(x, 0) = x$, ($0 < x < \ell$), ℓ being length of the rod.

8

[TURN OVER

Con. 9830-14.



(3 Hours)

[Total Marks : 80

- N. B. : (1) Question No. 1 is compulsory.
 (2) Solve any **three** questions from remaining **five** questions.
 (3) Assume suitable data if required.
 (4) Use of Mollier Chart, Steam table is permitted.

1. (a) What is cut-off ratio? How does it affect the thermal efficiency of Diesel cycle? 4
 (b) State the Clausius-Clapeyron equation. 4
 (c) 1 kg of steam at a pressure of 17 bar and dryness 0.95 is heated at a constant pressure until it is completely dry. Determine: (i) Increase in volume (ii) Quantity of heat added. 4
 (d) Differentiate between non-flow and flow process. What is steady flow process? 4
 (e) Define adiabatic flame temperature and explain its practical significance. 4
2. (a) Derive Maxwell's equations. 4
 (b) Show that the efficiency of all reversible heat engines operating between the same temperature limits is same. 8
 (c) 0.06 m³ air at 5 bar and 200°C expands isentropically until the pressure becomes 2 bar. It is then heated at constant pressure until the enthalpy increase during this process is 80 KJ. Calculate work done in each process and total work done. 8
3. (a) What are the four processes which constitute the Stirling cycle? Show that the regenerative Stirling cycle has same efficiency as the Carnot cycle. 6
 (b) An engine with 30% efficiency drives a refrigerator having COP of 5. What is the heat input into the engine if 10 MJ of heat is removed from the cold body by the refrigerator? Find total quantity of heat rejected to the surrounding. 6
 (c) The products of combustion of an unknown hydrocarbon C_xH_y have the following composition as measured by an Orsat apparatus:
 CO₂ = 8.0%, CO = 0.9% O₂ = 8.8% and N₂ = 82.3%
 Determine : (i) The composition of the fuel. 8
 (ii) The air-fuel ratio.
 (iii) The percentage excess air used.
4. (a) Define : (i) Dryness fraction 4
 (ii) Critical point
 (iii) Triple point
 (iv) Degree of superheat
 (b) 0.6 m³ of air at 37°C and 1 bar is heated at constant volume until the pressure becomes 2 bar. It is then cooled at constant pressure to its original temperature. Calculate the change of entropy in each process. 6

[TURN OVER

- (c) In an air standard cycle pressure at the beginning of compression is 1 bar, while temperature is 310 K. Compression ratio is 10:1, Heat added is 2800 KJ/Kg of charge. The maximum pressure limit is 70 bar. If heat is added partially at constant volume and partially at constant pressure, find: 10
- (i) Air standard efficiency (ii) Mean effective pressure.
5. (a) Explain: (i) Enthalpy of reaction (ii) Enthalpy of formation (iii) Heating value. 6
- (b) How much of the 1200 KJ of thermal energy at 700 K can be converted to useful work if the environment is at 25°C 4
- (c) A turbocompressor delivers 2.33 m³/s of air at 0.276 MPa, 43°C which is heated at this pressure to 430°C and finally expanded in a turbine which delivers 860 kW. During expansion there is a heat transfer of 0.09 MJ/s to the surroundings. Calculate the turbine exhaust temperature if changes in kinetic and potential energy are negligible. 10
6. (a) Derive an expression for availability of a non flow process. 8
- (b) In a reheat cycle steam at 500°C expands in H.P. turbine till it is saturated vapour. It is reheated at constant pressure to 400°C and then expands in L. P. turbine to 40°C. If the maximum moisture content is limited to 15% at the turbine exhaust, find 12
- (i) Reheat pressure.
- (ii) The pressure of steam at inlet to H.P. turbine.
- (iii) Net specific work output.
- (iv) Cycle efficiency.
- (v) Steam rate.

